


BOIS & AGGLOMÉRÉS

TÊTE FRAISÉE EMPREINTE ÉTOILE

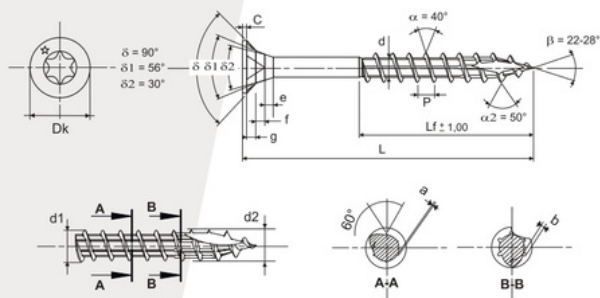

CARACTÉRISTIQUES TECHNIQUES

	Ø 3	Ø 3,5	Ø 4	Ø 4,5	Ø 5	Ø 6
Profondeur empreinte	1,30 / 1,60	1,40 / 1,70	1,40 / 1,70	1,80 / 2,10	2,10 / 2,40	2,40 / 2,70
N° empreinte	TX 10	TX 15	TX 20	TX 20	TX 25	TX 30
Dk	5,70 ± 0,20	6,70 ± 0,20	7,70 ± 0,20	8,70 ± 0,20	9,30 ± 0,20	11,30 ± 0,20
C	0,30 / 0,60	0,30 / 0,60	0,40 / 0,70	0,50 / 0,80	0,60 / 0,90	0,70 / 1,10
g	1,00	1,20	1,45	1,60	1,63	1,74
f	1,04	1,20	1,35	1,50	1,60	2,32
e	1,01	1,13	1,25	1,39	1,50	2,39
d	1,80 / 2,10	2,00 / 2,30	2,30 / 2,60	2,50 / 2,80	2,90 / 3,30	3,60 / 4,10
P	1,70 ± 10%	2,00 ± 10%	2,30 ± 10%	2,60 ± 10%	2,90 ± 10%	3,50 ± 10%
d1	2,95	3,45	3,95	4,45	4,95	5,95
d2	3,05	3,55	4,05	4,55	5,05	6,05
a/b	0,22 / 0,22	0,22 / 0,27	0,22 / 0,32	0,22 / 0,37	0,22 / 0,42	0,22 / 0,45
Couple de rupture mini	1,80 Nm	2,60 Nm	3,90 Nm	5,00 Nm	7,00 Nm	11,50 Nm

Pour les vis ROCKET inférieures à 25 mm, les diamètres d1 et d2 sont identiques

Tous Ø L = 12/16	20/30	35/55*	60/100**	110/120	130/180	200
Tolérance 0/-0,90	0 / -1,05	0 / -1,25	0 / -1,50	0 / -1,75	0 / -2,00	0 / -2,50

* sauf 6x40/22 = 0/-1,05

** sauf 4x80/45 - 5x90/50 - 5x100/60 = 0/-1,75
6x80/50 - 6x90/50 = 0/-1,25



EN 14592
+A1 2012

Acier zingué blanc



TX




EN 14592
+A1 2012

\ BOIS & AGGLOMÉRÉS

TÊTE FRAISÉE EMPREINTE ÉTOILE

FILETAGE PARTIEL




Ø	Longueur totale (L)	Longueur fileté (Lf)	Numéro embout	Type de boîte	Quantité boîte
3	35	22	TX 10	B	500
	40	22	-	B	500
	45	22	-	B	500
3,5	30	18	TX 15	B	500
	35	22	-	B	500
	40	22	-	B	500
4	50	30	-	C	500
	30	18	TX 20	B	500
	35	22	-	C	500
4,5	40	22	-	C	500
	45	30	-	C	500
	50	30	-	C	500
5	55	35	-	D	500
	60	35	-	D	500
	70	45	-	D	500
6	80	45	-	D	200
	35	22	TX 20	C	500
	40	22	-	C	500
7	45	30	-	C	500
	50	30	-	D	500
	55	35	-	D	500
8	60	35	-	D	500
	70	45	-	C	200

\ Acier zingué blanc

\ BOIS & AGGLOMÉRÉS

TÊTE FRAISÉE EMPREINTE ÉTOILE

FILETAGE PARTIEL



Ø	Longueur totale (L)	Longueur fileté (Lf)	Numéro embout	Type de balle	Quantité balle
5	30	18	TX 25	C	500
35	22	-	-	C	500
40	22	-	-	C	500
45	30	-	-	D	500
50	30	-	-	D	500
55	35	-	-	C	200
60	35	-	-	C	200
70	45	-	-	C	200
80	50	-	-	D	200
90	50	-	-	D	200
100	60	-	-	D	200
110	70	-	-	D	200
120	70	-	-	D	150
6	40	22	TX 30	C	200
50	30	-	-	C	200
60	35	-	-	D	200
70	45	-	-	D	150
80	50	-	-	D	150
90	50	-	-	D	150
100	60	-	-	D	150
110	70	-	-	D	100
120	70	-	-	D	100
130	70	-	-	D	100
140	70	-	-	D	100
150	70	-	-	D	100
160	70	-	-	D	100
180	70	-	-	H23	100
200	70	-	-	H23	100



CE
EN 14592
+A1 2012



\ Acier zingué blanc

