

TÊTE RONDE STANDARD


CONFORME À LA NORME NF EN ISO 15977



ALUMINIUM ACIER ZINGUÉ

Application

Automobile
Voiture
Equipement de loisirs
Raquette de neige
Mobilier, tables

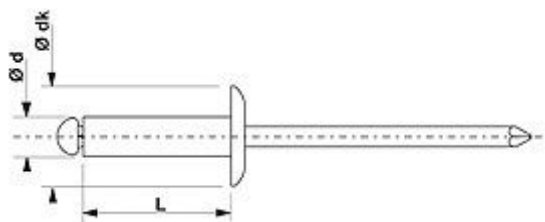

Ø	L	DK				
mm	mm	mm	mm	mm	N	N
2,4	4	5,0	0,5 - 2,0	2,6	350	250
2,4	6	5,0	2,0 - 4,0	2,6	350	250
2,4	8	5,0	4,0 - 6,0	2,6	350	250
2,4	10	5,0	6,0 - 8,0	2,6	350	250
2,4	12	5,0	8,0 - 10,0	2,6	350	250
3,0	4	6,0	0,5 - 1,5	3,2	550	400
3,0	6	6,0	1,0 - 3,0	3,2	550	400
3,0	8	6,0	3,0 - 5,0	3,2	550	400
3,0	10	6,0	5,0 - 7,0	3,2	550	400
3,0	12	6,0	7,0 - 9,0	3,2	550	400
3,0	14	6,0	9,0 - 11,0	3,2	550	400
3,0	16	6,0	11,0 - 13,0	3,2	550	400
3,0	18	6,0	13,0 - 15,0	3,2	550	400
3,0	20	6,0	15,0 - 17,0	3,2	550	400
3,2	4	6,5	0,5 - 1,5	3,4	700	500
3,2	6	6,5	1,0 - 3,0	3,4	700	500
3,2	8	6,5	3,0 - 5,0	3,4	700	500
3,2	10	6,5	5,0 - 7,0	3,4	700	500
3,2	12	6,5	7,0 - 9,0	3,4	700	500
3,2	14	6,5	9,0 - 11,0	3,4	700	500
3,2	16	6,5	11,0 - 13,0	3,4	700	500
3,2	18	6,5	13,0 - 15,0	3,4	700	500
3,2	20	6,5	15,0 - 17,0	3,4	700	500
3,2	25	6,5	17,0 - 22,0	3,4	700	500
4,0	6	8,0	0,5 - 2,0	4,2	1800	1250
4,0	8	8,0	2,0 - 4,0	4,2	1800	1250
4,0	10	8,0	4,0 - 6,0	4,2	1800	1250
4,0	12	8,0	6,0 - 8,0	4,2	1800	1250
4,0	14	8,0	8,0 - 10,0	4,2	1800	1250
4,0	16	8,0	10,0 - 12,0	4,2	1800	1250
4,0	18	8,0	12,0 - 14,0	4,2	1800	1250
4,0	20	8,0	14,0 - 16,0	4,2	1800	1250
4,0	25	8,0	16,0 - 21,0	4,2	1800	1250
4,0	30	8,0	21,0 - 26,0	4,2	1800	1250
4,0	35	8,0	26,0 - 31,0	4,2	1800	1250

Ø	L	DK				
mm	mm	mm	mm	mm	N	N
4,8	6	9,5	0,5 - 1,5	5,0	2600	1580
4,8	8	9,5	1,0 - 3,0	5,0	2600	1580
4,8	10	9,5	3,0 - 5,0	5,0	2600	1580
4,8	12	9,5	5,0 - 7,0	5,0	2600	1580
4,8	14	9,5	7,0 - 9,0	5,0	2600	1580
4,8	16	9,5	9,0 - 11,0	5,0	2600	1580
4,8	18	9,5	11,0 - 13,0	5,0	2600	1580
4,8	20	9,5	13,0 - 15,0	5,0	2600	1580
4,8	22	9,5	15,0 - 17,0	5,0	2600	1580
4,8	25	9,5	17,0 - 20,0	5,0	2600	1580
4,8	30	9,5	20,0 - 25,0	5,0	2600	1580
4,8	35	9,5	25,0 - 30,0	5,0	2600	1580
6,0	8	11,5	1,5 - 2,5	6,2	3900	2500
6,0	10	11,5	2,0 - 4,0	6,2	3900	2500
6,0	12	11,5	4,0 - 6,0	6,2	3900	2500
6,0	14	11,5	6,0 - 8,0	6,2	3900	2500
6,0	16	11,5	8,0 - 10,0	6,2	3900	2500
6,0	18	11,5	10,0 - 12,0	6,2	3900	2500
6,0	22	11,5	14,0 - 16,0	6,2	3900	2500
6,0	25	11,5	16,0 - 19,0	6,2	3900	2500
6,0	30	11,5	19,0 - 24,0	6,2	3900	2500
6,4	10	12,0	2,0 - 4,0	6,6	4090	3120
6,4	12	12,0	4,0 - 6,0	6,6	4090	3120
6,4	16	12,0	6,0 - 10,0	6,6	4090	3120
6,4	18	12,0	10,0 - 12,0	6,6	4090	3120
6,4	20	12,0	12,0 - 14,0	6,6	4090	3120
6,4	25	12,0	14,0 - 19,0	6,6	4090	3120
6,4	30	12,0	19,0 - 24,0	6,6	4090	3120