



RIVQUICK®

Power tools

BOLLHOFF

RIVQUICK® P series - *Hydraulic/pneumatic blind setting tools*

A light and robust range of tools



For small quantities or large productions runs



Complete with mandrel container equipped with a vacuum system and security valve to switch off air supply



RIVQUICK® B series - *Battery operated setting tools*

A well-balanced portable tool



An electric range for high assembly rate



Facilitate access to cramped environment



RIVQUICK® P series - Multi-purpose riveting capabilities

RIVQUICK® P1000



	Ø						
	2,4	3,0	3,2	4,0	5,0	6,0	6,4
Alu	☐	☐	☐	☐	☐		
Zinc plated	☐	☐	☐	☐	☐		
Stainless steel	☐	☐	☐	☐	☐		

 **226 030** 01000 - delivered with 3,2 / 4,0 / 5,0 nose pieces for each type.

RIVQUICK® P2000



	Ø						
	2,4	3,0	3,2	4,0	5,0	6,0	6,4
Alu				☐	☐	☐	☐
Zinc plated				☐	☐	☐	☐
Stainless steel				☐	☐	☐	☐

 **226 031** 01000 - delivered with 4,0 / 5,0 / 6,0 nose pieces for each type.

RIVQUICK® P3000



	Ø						
	2,4	3,0	3,2	4,0	5,0	6,0	6,4
Alu					☐	☐	☐
Zinc plated					☐	☐	☐
Stainless steel					☐	☐	☐

 **226 032** 01000 - delivered with 5,0 / 6,0 / 6,4 nose pieces for each type.

RIVQUICK® B series - Multi-purpose riveting capabilities

RIVQUICK® B2000



	Ø						
	2,4	3,0	3,2	4,0	5,0	6,0	6,4
Alu	☐	☐	☐	☐	☐		
Zinc plated	☐	☐	☐	☐	☐		
Stainless steel	☐	☐	☐	☐	☐		

 **226 040** 01000 - delivered with 2 batteries (1,4 Ah) and the noses 2,4 / 3,2 / 4,0 / 5,0

RIVQUICK® B3000




	Ø						
	2,4	3,0	3,2	4,0	5,0	6,0	6,4
Alu				☐	☐	☐	☐
Zinc plated				☐	☐	☐	☐
Stainless steel				☐	☐	☐	☐

 **226 041** 01000 - delivered with 2 batteries (2,8 Ah) and the noses 4,0 / 5,0 / 6,0 / 6,4 / 4,8 Varibolt / 6,4 Varibolt

RIVQUICK® P series - Technical characteristics

Benefits:

- Light
- Ergonomic
- Security
- A full range of accessories

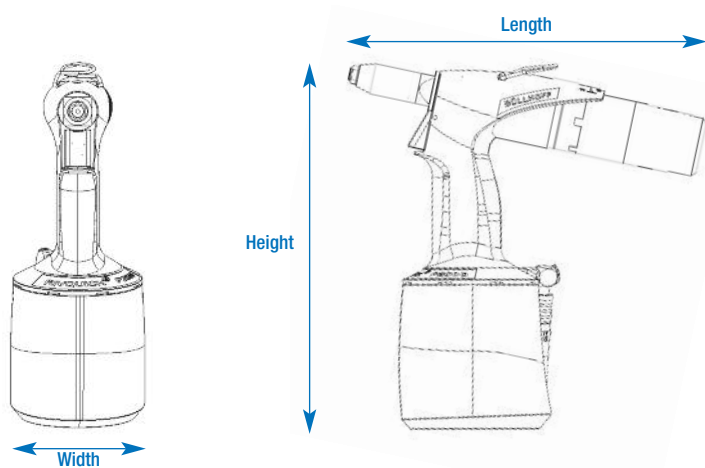


	RIVQUICK® P1000	RIVQUICK® P2000	RIVQUICK® P3000
Weight	1 250 g	1 650 g	1 800 g
L x H x W	268 x 264 x 101 mm	272 x 275 x 120 mm	272 x 277 x 130 mm
Setting force	7 300 N	12 500 N	16 000 N
Tool stroke	17 mm	21 mm	25 mm
Air pressure	5 - 7 bars	5 - 7 bars	5 - 7 bars
Air consumption	1,5 l/cycle	2,5 l/cycle	3,0 l/cycle
Sound level	< 70 dB (A)	< 70 dB (A)	inf 70 dB (A)
Cycle time	35 to 80 pcs/min	25 to 50 pcs/min	25 to 40 pcs/min

RIVQUICK® B series - Technical characteristics

Benefits:

- Robust
- Convenient battery operation
- Ease of use
- Performance

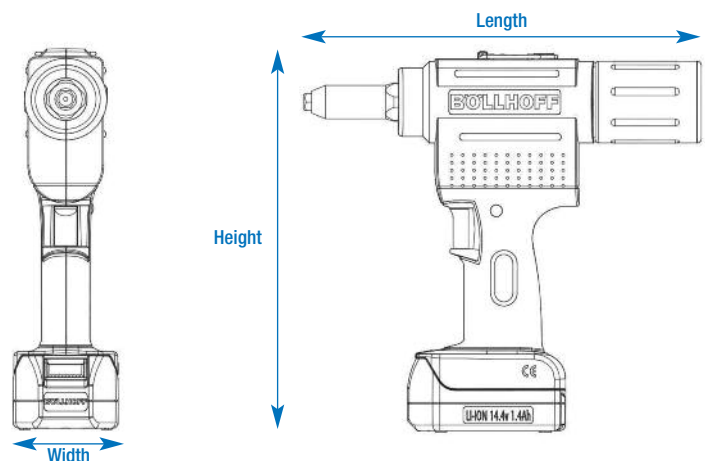

	RIVQUICK® B2000	RIVQUICK® B3000
Weight	2 000 g	2 200 g
L x H x W	285 x 273 x 75 mm	285 x 283 x 75 mm
Setting force	10 000 N	18 000 N
Tool stroke	20 mm	27 mm
Battery	Li-Ion-14,4V-1,4Ah	Li-Ion-14,4V-2,8Ah
Sound level	< 70 dB (A)	< 70 dB (A)
Cycles number/battery	550*	770*
Charging time	< 60 min	< 60 min
Cycle time	27 to 30 pcs/min	20 to 25 pcs/min

* Setting of alu/steel rivets diameter 4,0

RIVQUICK® P series - Spare parts / Tooling

		RIVQUICK® P1000	RIVQUICK® P2000	RIVQUICK® P3000
Nose piece 	Ø 2,4	226 030 24001		
	Ø 3,2	226 030 32001		
	Ø 4,0	226 030 40001		
	Ø 5,0	226 030 50001		
	Ø 6,0		226 031 60001	
	Ø 6,4		226 031 64001	
	Ø 4,8 Varibolt		226 031 48001	
	Ø 6,4 Varibolt			226 032 64001
1 set of jaws 3 pieces	Ø 2,4 ➔ Ø 6,4	226 030 00002		

Accessories

		RIVQUICK® P1000	RIVQUICK® P2000	RIVQUICK® P3000
Extended nose piece 	XX = 110 mm	226 030 00110	226 031 00110	226 032 00110
	XX = 160 mm	226 030 00120	226 031 00120	226 032 00120
	XX = 210 mm	226 030 00130	226 031 00130	226 032 00130

Length of a standard nose piece = 64 mm

RIVQUICK® B series - Spare parts / Tooling

		RIVQUICK® B2000	RIVQUICK® B3000
Nose piece 	Ø 2,4	226 040 24001	
	Ø 3,2	226 040 32001	
	Ø 4,0	226 040 40001	
	Ø 5,0	226 040 50001	
	Ø 6,0		226 041 60001
	Ø 6,4		226 041 64001
	Ø 4,8 Varibolt		226 041 48002
	Ø 6,4 Varibolt		226 041 64003
1 set of jaws 3 pieces	Ø 2,4 ➔ Ø 6,0	226 040 00004	
	Ø 6,4		226 041 00004
Battery 	Li-Ion-14,4V-1,4Ah	226 040 00018	
	Li-Ion-14,4V-2,8Ah	226 040 00019	
Battery charger 	100-240V~50-60Hz-1A	226 040 00020	



<http://www.fixnvis.nl/>

